



LPR 20 / SED 2000

Reliable printing

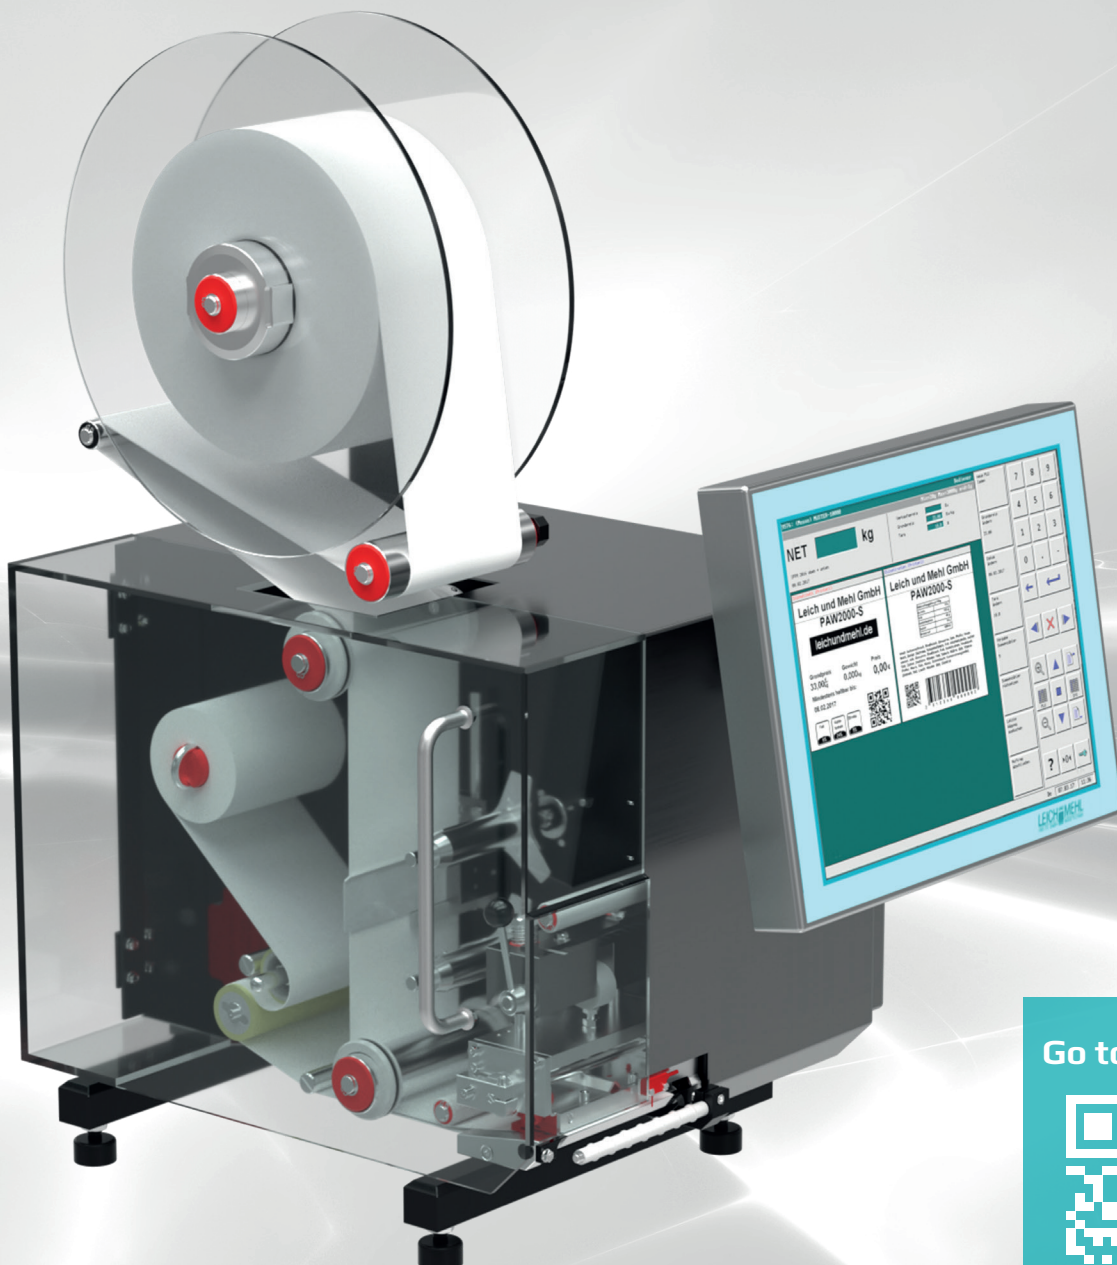

Go to product page



Flexible in Use

The LPR20 and SED2000 label printers are designed for the demanding environmental conditions in food production and support printing speeds of up to 300 mm/s. Like all printers from our company, they are Unicode-capable. Article and label management is handled via the integrated control unit and operation panel or centrally through the PAW2000. Alternatively, label design can also be carried out on a PC using the LANScale Designer.

The **LPR20** is a fully functional label printer with its own control unit in an industrial-grade design and can also be used independently of the PAW2000.

The **SED2000** can be used as an additional device to the PAW2000 for printing total labels. The total label is automatically pre-dispensed once the specified weight, price or quantity has been reached.

✓ Convincing in terms of Quality

- All structural components are designed for maximum stability and durability
- Robust, industrial-grade design made of non-corrosive materials

✓ Modern Technology

- Large 15"-Touchscreen
- Open XML interface allows seamless integration into ERP systems
- Remote control and maintenance module available
- optional OPC-UA interface available

Application	Label printer
Output	Up to 300 labels/min depending on label length and quality
Label format	Width: 35 – 110 mm
Roll Diameter	Up to 350 mm
Printing Method	Thermal direct optional: thermal transfer
Resolution	8 dot/mm optional: 12 dot/mm
Print Width	104 mm
Print Speed	Up to 300 mm/s
Interfaces	RS 232C, RS 422/485, Ethernet (TCP/IP) Other interfaces on request
Power Supply	230 V, 50 Hz
Connected Load	Approx. 0,5 kVA
Connection of Additional Devices	Any number of additional printers and standard accessories or peripheral devices